



FLEXIBLE PERMANT SEAL FOR PRECAST VAULT LIDS




GOAL: TO CREATE A FLEXIBLE PERMANENT SEAL FOR PRECAST VAULT LIDS

MATERIALS:

- VISCOTAQ SEALANT , VISCOTAQ EZ Wrap
- Power washer, dry air (compressor)
- Applicator gun for 30 oz cartridges (handheld or air)
- Backerod or foam backer
- Seam Roller

APPLICATION:

- Clean surface free from dust, dirt, grease with for instance a power wash. Clean with dry air afterwards. When necessary, place a backerod or foam backer such that a 1 inch fill is left
- Apply the VISCOTAQ SEALANT minimum 1 inch deep until filled to the top (see drawing. To create a good fill, keep displacing the material with an applicator gun
- Apply the EZ Wrap 4 inch wide creating an overlap of minimum 1 inch on each concrete side Press the EZ Wrap down with a steel seam roller.
- Materials are ready for back fill immediately

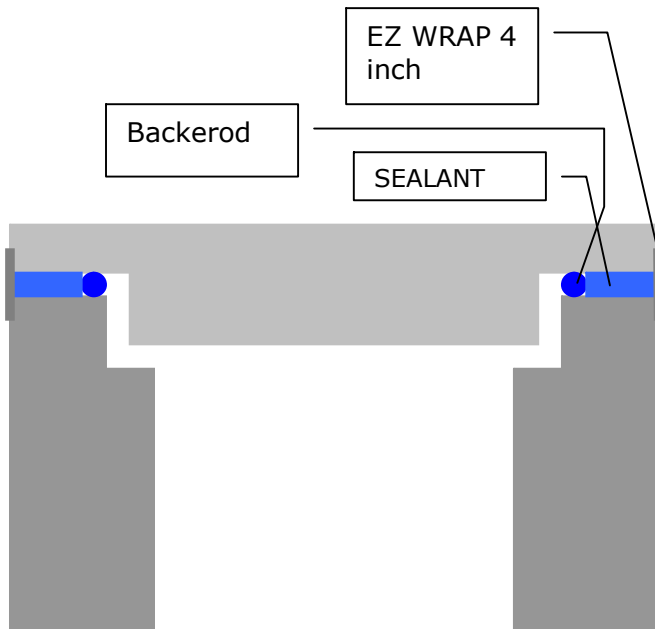

THE PROPERTIES:

- Easy to apply
- Remains pliable, re-openable
- Power wash cleaning
- Long term protection
- Non toxic
- Weather/salt resistant
- freeze/thaw resistant
- -40 to 158 F
- Technology filed for patents
- cold applied
- environmental friendly
- no primers
- UV RESISTANT
- CP RESISTANT
- Molds and forms easily
- Solving difficult problems
- Compatible with nowadays available coatings
- Tested according to latest specifications
- ISO9001
- Made in the USA
- 70 mils
- Tested to latest ASTM and CSA standards